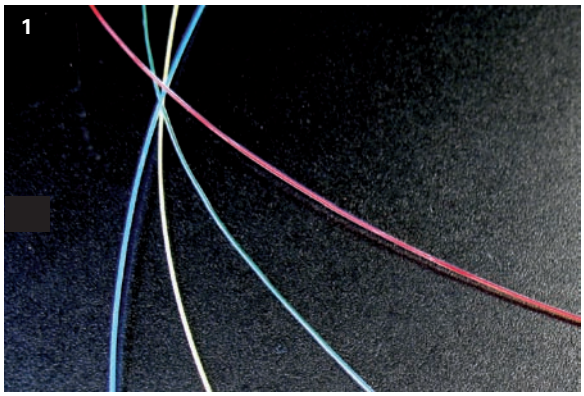

Color code of the Pigtails:

1.	red	=	Swisscom active
2.	green	=	ready
3.	yellow	=	reserved
4.	blue	=	reserved

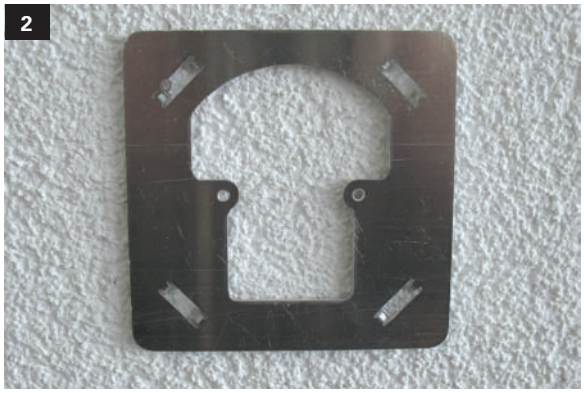

Mount the socket on the wall.

Cut the cable at 1.1 meter length.

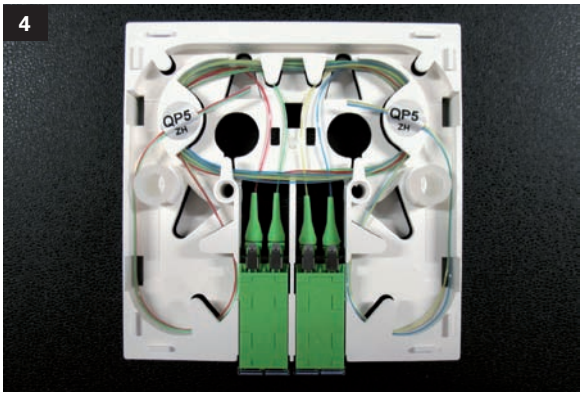

Delivery state of the installation frame.

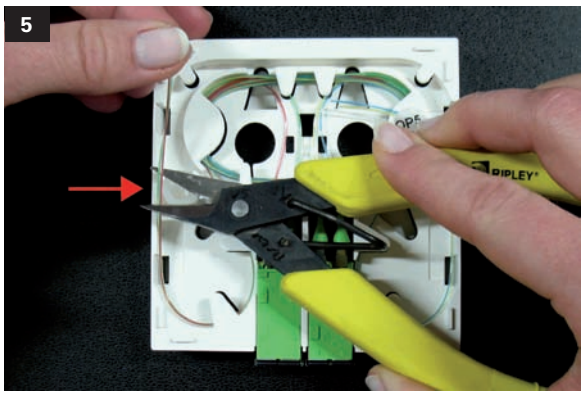

Cut all pigtail fibers to length for splicing

= In the middle of the spliceholder

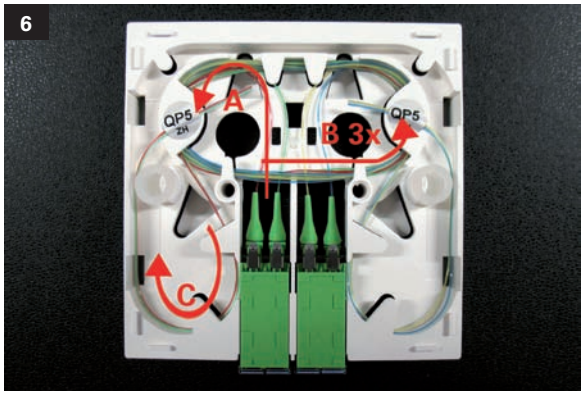

Remind the insert direction.
Fiber red and green how are as showed on the picture six.
Fiber yellow and blue mirror inverted.

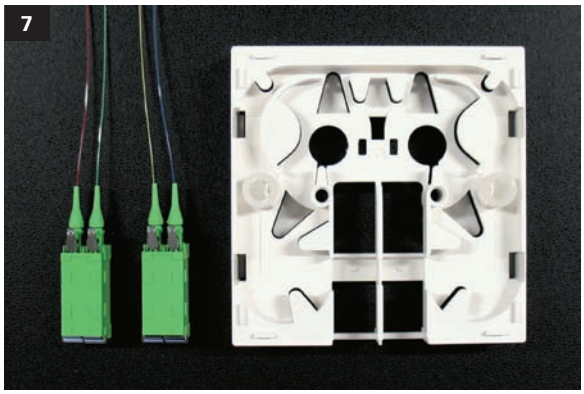

Remove the mating adapters with the pigtails.

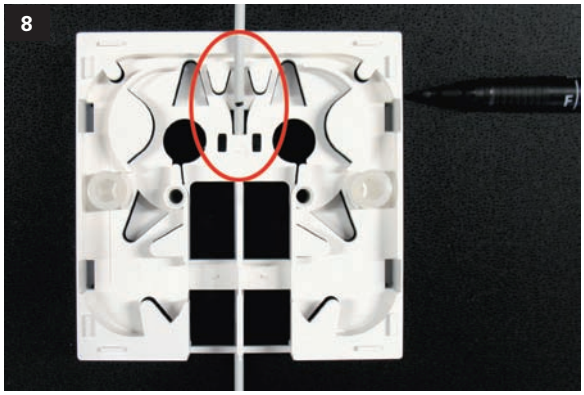

Pull the cable through the strain relief to the upper level and mark 0.5m.

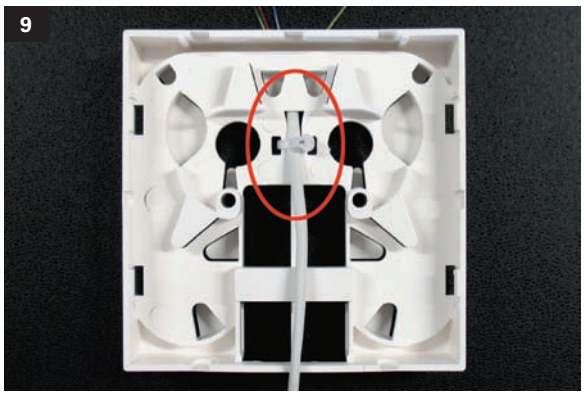

Turn the installation frame and attach the cable with the cable retainer.

Warning! The head of the cable retainer has to be on the backside of the installation frame.

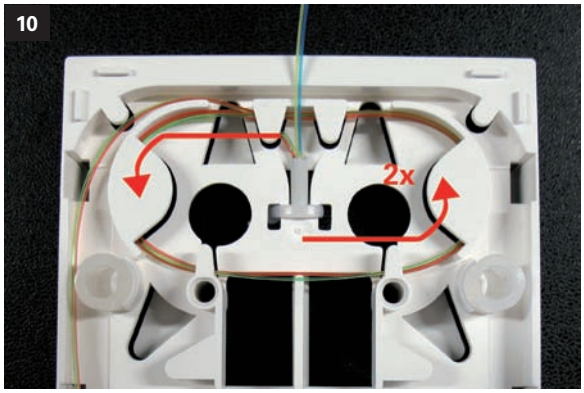

Fiber 1, red (Swisscom active) and
Fiber 2, green (ready)
Insert the fiber 2 rotations to the left, **counterclockwise**.

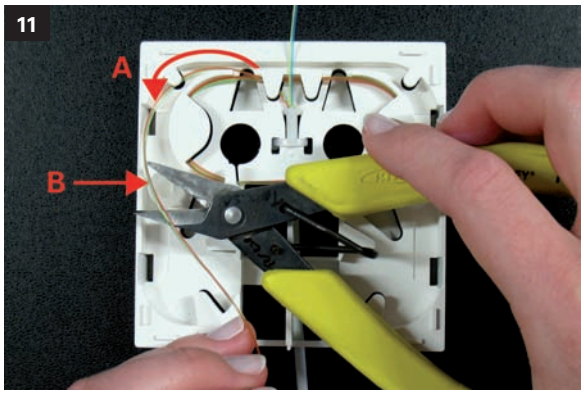

Gide the fibers to the left in the outer
course A and cut them to length for splicing B.

= In the middle of the spliceholder

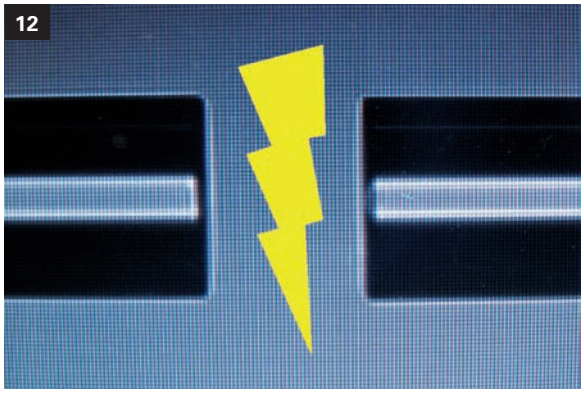

Remove the fibers out of the installation frame and splice them according the instruction of the splice unit.

Repeat steps 11 and 12 with the fiber yellow and blue mirror inverted.

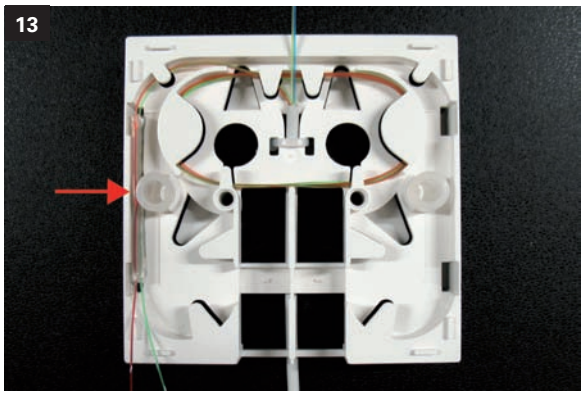

Reinsert the fiber of the cable reserve (steps 10 + 11) and clip the two splice-protections one upon the other behind the spliceholder.

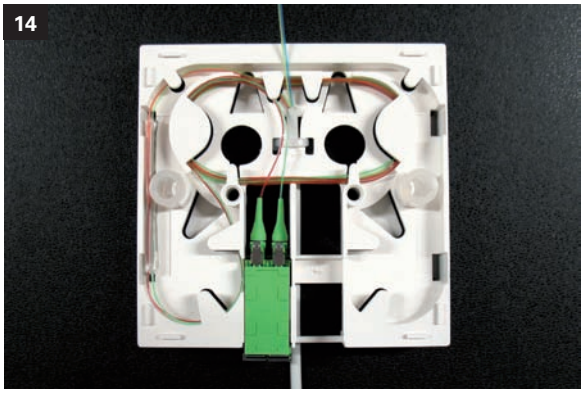

Insert the pigtail fiber, without disconnecting the pigtail from the mating adapter.
Notice the insert direction. (Step 6)

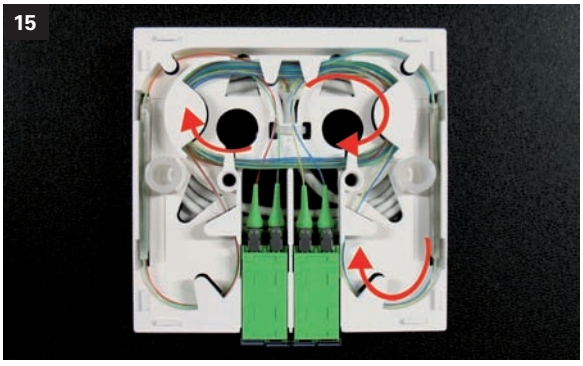

Insert the fiber yellow and blue clockwise, to the right. Compare steps 13 + 14.

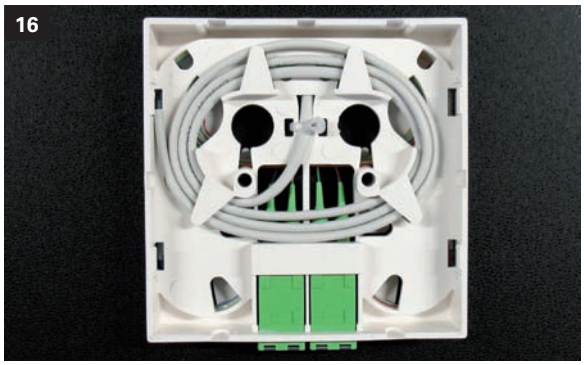

Flip the installation frame over and insert the cable reserve on the backside.

Screw the frame and the optical disc tight to the socket.

At least click in the slip of paper, with the indication-numbers and the Perspex on the cover.

HAUPTSITZ

DIAMOND SA
Via dei Patrizi 5
CH-6616 Losone
Tel. +41 91 785 45 45
Fax +41 91 785 45 00
www.diamond-fo.com

Vertriebs- und Service Center Zürich

DIAMOND SA
Industriestrasse 8
CH-8625 Gossau
Tel. +41 43 833 80 80
Fax +41 43 833 80 90
www.diamond.ch

Vertriebs- und Service Center Port - Biel/Bienne

DIAMOND SA
Spärstrasse 5
CH-2562 Port
Tel. +41 32 722 11 11
Fax +41 32 722 11 10
www.diamond.ch